# HYE60YL63

Category: تقنية

written by Mahdi MILED | 19 نوفمبر، 2024

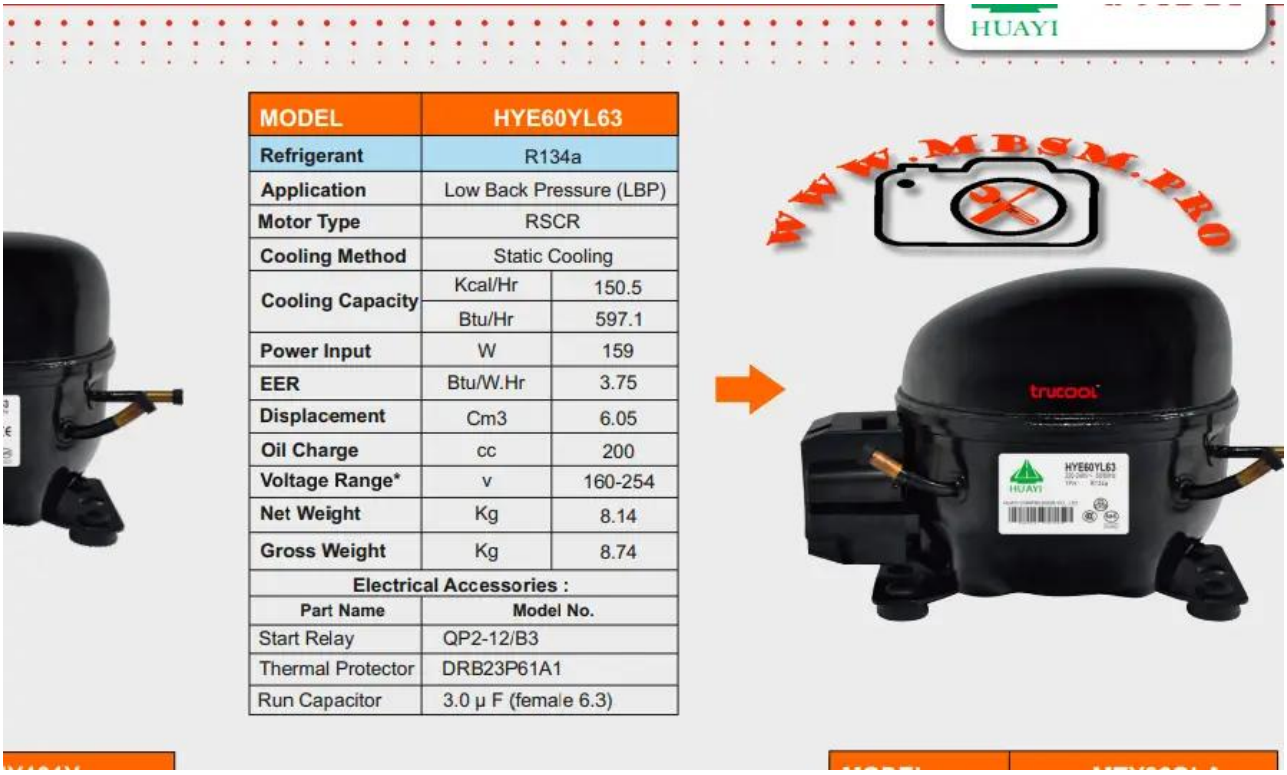


| MODEL | HYE60YL63 | |
|---|---|---|
| Refrigerant | R134a | |
| Application | Low Back Pressure (LBP) | |
| Motor Type | RSCR | |
| Cooling Method | Static Cooling | |
| Cooling Capacity | Kcal/Hr | 150.5 |
| | Btu/Hr | 597.1 |
| Power Input | W | 159 |
| EER | Btu/W.Hr | 3.75 |
| Displacement | Cm3 | 6.05 |
| Oil Charge | cc | 200 |
| Voltage Range* | v | 160-254 |
| Net Weight | Kg | 8.14 |
| Gross Weight | Kg | 8.74 |
| Electrical Accessories : | | |
| Part Name | Model No. | |
| Start Relay | QP2-12/B3 | |
| Thermal Protector | DRB23P61A1 | |
| Run Capacitor | 3.0 μ F (female 6.3) | |

Huayi, HYE60YL63, Compresseur, 1/5 cv, r134a, 146 kcal, tout cuivre

## مواصفات ضاغط HYE60YL63

**HYE60YL63** هو ضاغط تبريد تنتجه شركة هوياي، وهو مصمم للاستخدام مع المبرد R134a. إليك أهم المواصفات والميزات:

# المواصفات

- **القدرة**: 1/5 حصان (حوالي 0.15 كيلو واط)
- **سعة التبريد**: حوالي 146 إلى 150.5 كيلو كالوري/ساعة، حسب المصدر.
- **المبرد**: R134a
- **نوع المحرك**: RSCR (محرك أحادي الطور، بدء تشغيل بسعة مكثف، تشغيل بسعة مكثف).
- **الجهد الكهربائي**: عادةً يعمل على 220-240 فولت.

# الأداء

هذا الضاغط مناسب لمجموعة متنوعة من تطبيقات التبريد، حيث يوفر تبريدًا فعالًا تحت ظروف nominal. يمكنه العمل بكفاءة عند درجات حرارة تبخر منخفضة (حتى -25 درجة مئوية).

# البناء

يتميز HYE60YL63 ببناء كامل من النحاس، مما يعزز المتانة الكفاءة في توصيل الحرارة.يستخدم هذا الضاغط عادةً في أنظمة التبريد التجارية ويمكن العثور عليه من مختلف الموردين عبر الإنترنت.

Picture Private Copyright WWW.MBSMGROUP.TN

تنزيلMbsm-tn-private-media_HYE60YL63