

MKV190GL2J

Category: تقنية

2024 written by Mahdi MILED | 23

BLDC LBP												
R 134a LBP												
RATED VOLTAGE	MODEL	VOLTAGE [V-Hz]	RUNNING RPM	COOLING CAPACITY			POWER		EFFICIENCY			COOLING TYPE
				Kcal/Hr	Watt	BTU/Hr	W	Kcal/WHr	COP WW	EER BTU/WHr		
AC 115V-60Hz	MKV172C-L2J	115-60	1800	110	128	437	72	1.53	1.78	6.07	FC	
			2200	135	157	536	90	1.50	1.74	5.96		
			2880	176	205	699	120	1.47	1.71	5.82		
			3480	212	247	842	151	1.40	1.63	5.57		
			3600	223	259	885	160	1.39	1.62	5.53		
	MKV190C-L2B	115-60	1800	146	170	580	89	1.64	1.91	6.51	FC	
			2200	174	202	691	107	1.63	1.89	6.46		
			2880	227	264	901	145	1.57	1.82	6.22		
			3480	274	319	1088	186	1.47	1.71	5.85		
	MKV190C-L2J	115-60	3600	294	342	1167	200	1.47	1.71	5.84	FC	
			1800	146	170	580	93	1.57	1.83	6.23		
			2200	174	202	691	113	1.54	1.79	6.11		
AC 220-240V-50Hz, 220V-60Hz	MKV172G-L2J	220-50/60	2880	227	264	901	152	1.49	1.74	5.93	FC	
			3480	274	319	1088	195	1.41	1.63	5.58		
			3600	294	342	1167	210	1.40	1.63	5.56		
			1800	110	128	437	72	1.53	1.78	6.07		
			2200	135	157	536	90	1.50	1.74	5.96		
	MKV190G-L2B	220-50/60	2880	176	205	699	120	1.47	1.71	5.82	FC	
			3480	212	247	842	151	1.40	1.63	5.57		
			3600	223	259	885	160	1.39	1.62	5.53		
			1800	146	170	580	89	1.64	1.91	6.51		
	MKV190G-L2J	220-50/60	2200	174	202	691	107	1.63	1.89	6.46	FC	
			2880	227	264	901	145	1.57	1.82	6.22		
			3480	274	319	1088	186	1.47	1.71	5.85		
MKV190G-L2J	220-50/60	3600	294	342	1167	200	1.47	1.71	5.84	FC		
		1800	146	170	580	93	1.57	1.83	6.23			
		2200	174	202	691	113	1.54	1.79	6.11			
			1400	80	93	318	56	1.43	1.66	5.67		

Picture Private Copyright WWW.MBSMGROUP.TN

Compressor, SAMSUNG, MKV190GL2J, Bldc, 1/3 hp, Inverter, from 93 to 210 w, lbp, r134a, from 560 btu/h to 1167 btu/h

MKV190GL2J/E01 هو ضاغط من شركة سامسونج يتميز بمواصفات واستخدامات محددة. فيما يلي نظرة عامة مفصلة بناءً على المواصفات المقدمة:

نظرة عامة على المواصفات

التفاصيل	الخاصية
MKV190GL2J/E01	الموديل
سامسونج	الشركة
كوريا الجنوبية	الدولة
1/3	القدرة (hp)
من 1800 حتى 3600	السعة باللفة
من 580 حتى 1160	القدرة (BTU/h عند 23°C)
من 146 حتى 296	القدرة (kcal/h عند 23°C)
عادةً حوالي 210-93 W	القدرة (W)
R134a	المبرد
220-240V	الجهد الكهربائي
تبريد	الوظيفة
غير محددة بدقة	سعة التبريد
ضغط منخفض (LBP)	التطبيق
BLDC (تيار مباشر بدون فرش) تيار مستمر	النوع
نحاس	اللغائف

أمثلة على البدائل

MKV190GL2J/ASH .1


MKV190GL2J/SM1 .2

MKV190GL2J/ASH .3 (إصدارات بديلة)

أمثلة على الآلات التي تعمل بهذا الضاغط

1. موديل سامسونج SRF639GDLS
2. موديل سامسونج SRS580DHLS
3. موديل سامسونج RF23HCEDBSR

يستخدم هذا الضاغط بشكل أساسي في مجموعة متنوعة من ثلاجات وفريزرات سامسونج، مما يضمن أداء تبريد فعال في الأجهزة المنزلية. يُنصح بالتحقق من التوافق مع الموديلات المحددة قبل القيام بالاستبدال.

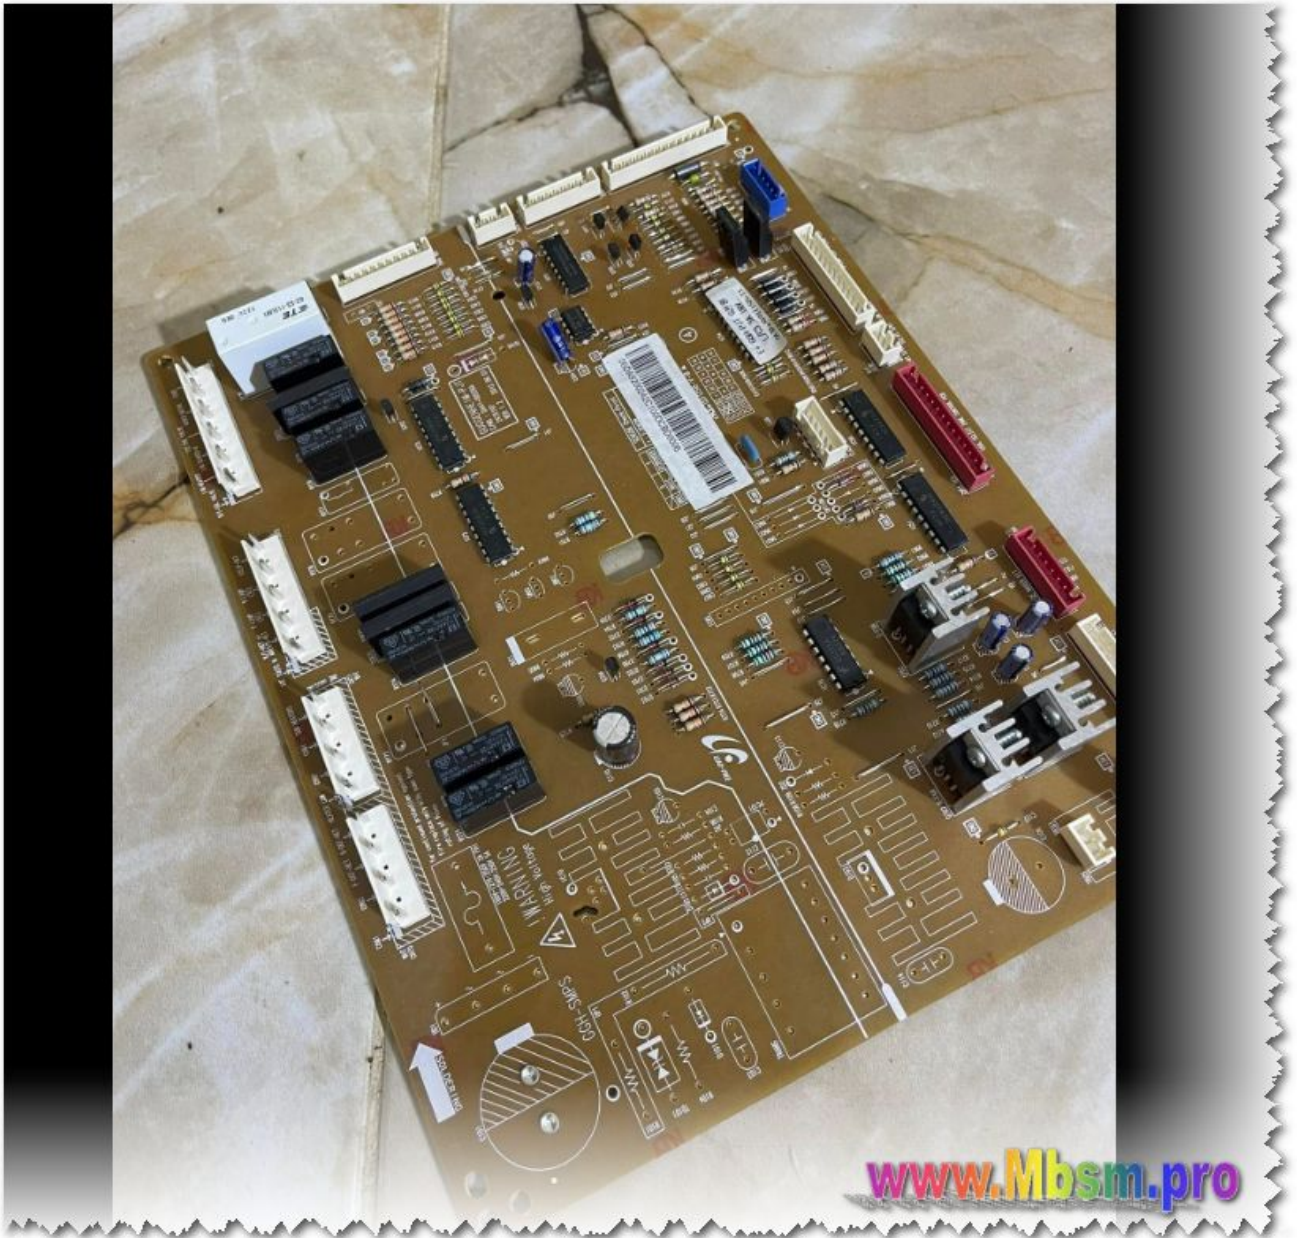




www.Mbsm.pro





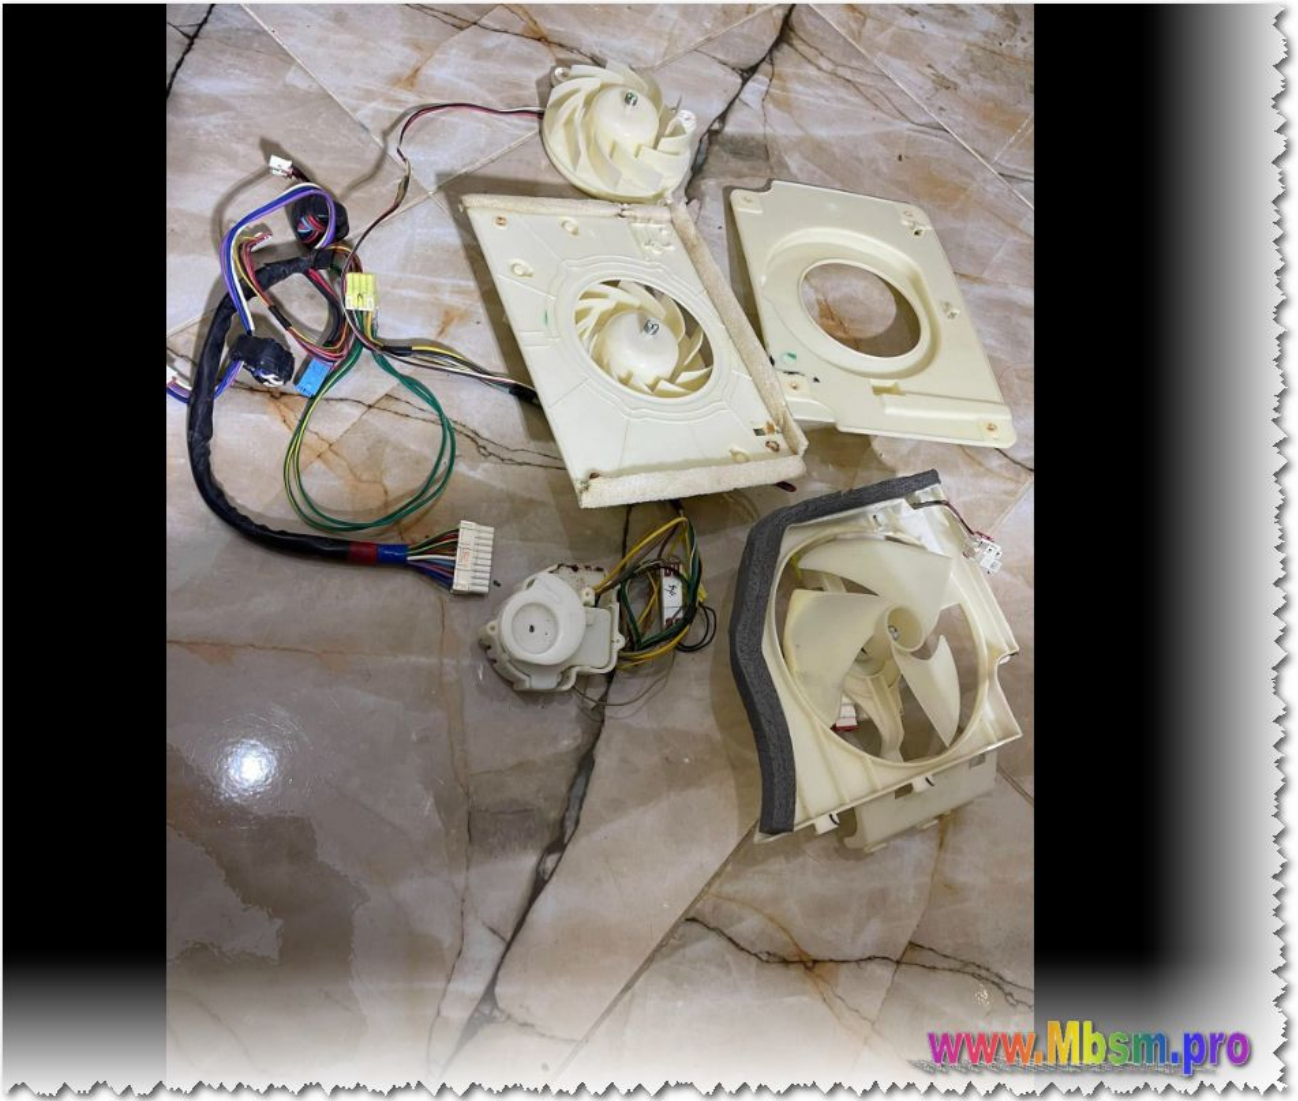







www.Mbsm.pro

Picture Private Copyright WWW.MBSMGROUP.TN

www.mbsm.pro



Picture Private Copyright WWW.MBSMGROUP.TN





www.Mbsm.pro

Picture Private Copyright WWW.MBSMGROUP.TN

R 134a LBP

RATED VOLTAGE	MODEL	VOLTAGE [V-Hz]	RUNNING RPM	ASHRAE						COOLING TYPE	
				COOLING CAPACITY			POWER INPUT W	EFFICIENCY			
				Kcal/Hr	Watt	BTU/Hr		EFF Kcal/Whr	COP W/W		EER BTU/Whr
AC 115V-60Hz	MKV172C-L2J	115-60	1800	110	128	437	72	1.53	1.78	6.07	FC
			2200	135	157	536	90	1.50	1.74	5.96	
			2880	176	205	699	120	1.47	1.71	5.82	
			3480	212	247	842	151	1.40	1.63	5.57	
			3600	223	259	885	160	1.39	1.62	5.53	
	MKV190C-L2B	115-60	1800	146	170	580	89	1.64	1.91	6.51	FC
			2200	174	202	691	107	1.63	1.89	6.46	
			2880	227	264	901	145	1.57	1.82	6.22	
			3480	274	319	1088	186	1.47	1.71	5.85	
			3600	294	342	1167	200	1.47	1.71	5.84	
	MKV190C-L2J	115-60	1800	146	170	580	93	1.57	1.83	6.23	FC
			2200	174	202	691	113	1.54	1.79	6.11	
			2880	227	264	901	152	1.49	1.74	5.93	
			3480	274	319	1088	195	1.41	1.63	5.58	
			3600	294	342	1167	210	1.40	1.63	5.56	
AC 220-240V-50Hz, 220V-60Hz	MKV172G-L2J	220-50/60	1800	110	128	437	72	1.53	1.78	6.07	FC
			2200	135	157	536	90	1.50	1.74	5.96	
			2880	176	205	699	120	1.47	1.71	5.82	
			3480	212	247	842	151	1.40	1.63	5.57	
			3600	223	259	885	160	1.39	1.62	5.53	
	MKV190G-L2B	220-50/60	1800	146	170	580	89	1.64	1.91	6.51	FC
			2200	174	202	691	107	1.63	1.89	6.46	
			2880	227	264	901	145	1.57	1.82	6.22	
			3480	274	319	1088	186	1.47	1.71	5.85	
			3600	294	342	1167	200	1.47	1.71	5.84	
	MKV190G-L2J	220-50/60	1800	146	170	580	93	1.57	1.83	6.23	FC
			2200	174	202	691	113	1.54	1.79	6.11	
			2880	227	264	901	152	1.49	1.74	5.93	
			3480	274	319	1088	195	1.41	1.63	5.58	
			3600	294	342	1167	210	1.40	1.63	5.56	
AC 200-240V-50Hz, 220V-60Hz	MSV162A-L1J	220-60	1400	80	93	318	56	1.43	1.66	5.67	ST
			2000	105	122	417	70	1.50	1.74	5.96	
			3000	155	180	615	105	1.48	1.72	5.86	
			4000	210	244	834	143	1.47	1.71	5.83	
	MSV162A-L1B	220-60	1200	60	70	238	43	1.40	1.62	5.54	ST
			2000	105	122	417	68	1.54	1.80	6.13	
			3000	155	180	615	103	1.50	1.75	5.97	
			4300	225	262	893	160	1.41	1.64	5.58	
	MSV172A-L1B	220-60	1200	67	78	266	50	1.34	1.56	5.32	ST
			2000	123	143	488	79	1.56	1.81	6.18	
			3000	192	223	762	125	1.54	1.79	6.10	
			4300	256	298	1016	186	1.36	1.58	5.41	

COOLING TYPE
 FC : Fan cooling
 OC : Oil cooling
 ST : Static

ASHRAE CONDITIONS (LBP)
 Evaporating Temp. : -23.3°C (-10°F)
 Condensing Temp. : 54.4°C (130°F)
 Gas Superheated to : 32.2°C (90°F)
 Liquid sub-cooled to : 32.2°C (90°F)
 Ambient Temp. : 32.2°C (90°F)

UNIT CONVERSION
 1 watt = 3.41 Btu/Hr
 1 watt = 0.86 Kcal/Hr
 1 Kcal/Hr = 3.97 Btu/Hr

www.Mbsm.pro

Picture Private Copyright WWW.MBSMGROUP.TN

https://www.mbsm.pro/wp-content/uploads/2024/11/Mbsm_dot_pro_private_PDF_compresores-samsung-pdf.pdf