
SLV15CNK

Category: تقنية

written by Mahdi MILED | 23 نوفمبر، 2024

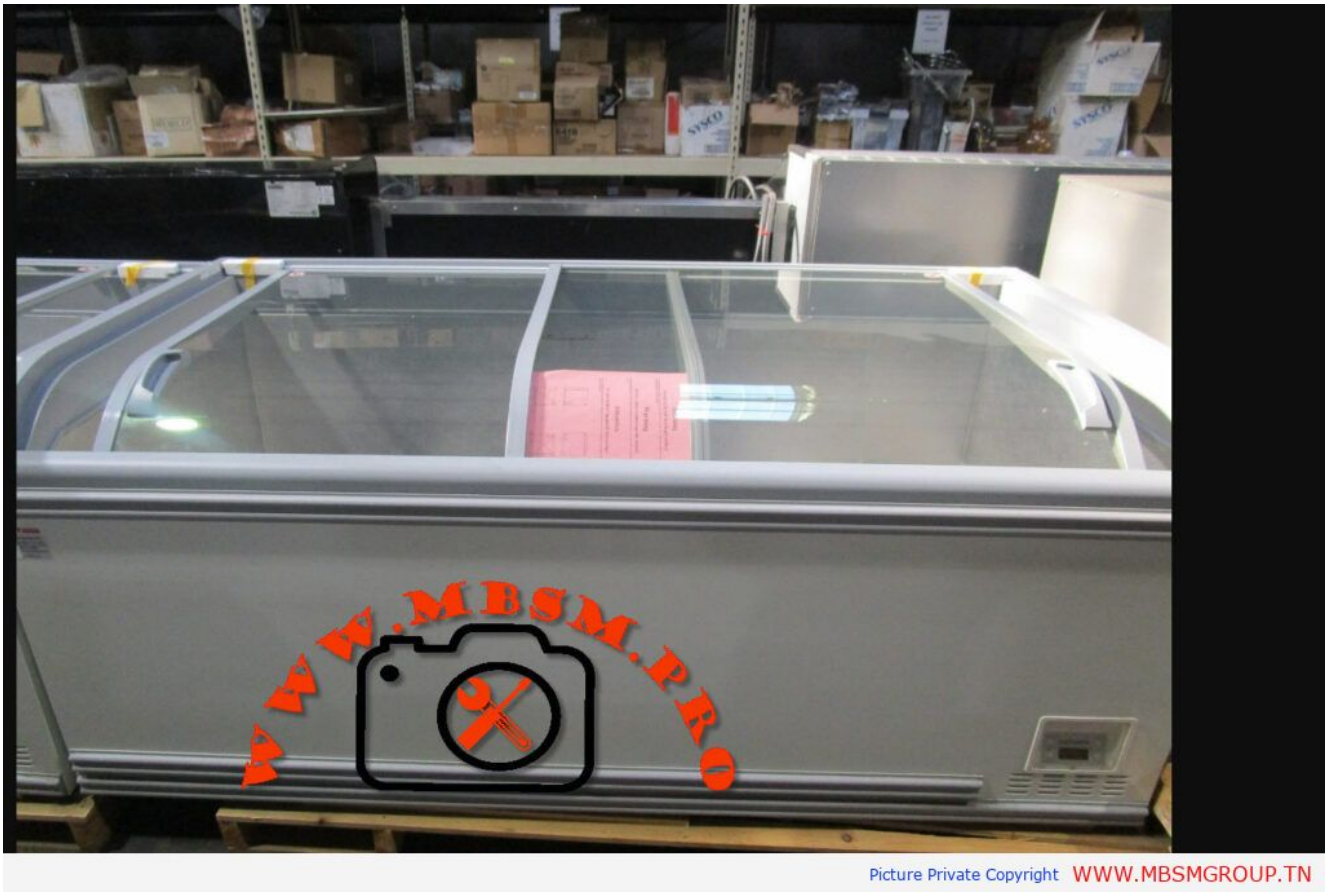

Compressor SLV15CNK.2 50/60Hz 220-240V refrigerant R290 height 199 mm LBP 12 kg displacement 15,28cm3

ATHEN210XL

Compressor SLV15CNK.2. Speed: 2000/2500/3000/4000 rev/minMore features: LBP 12 kg displacement 15.2 cm frequency:50/60Hz12kg15,28 cm 3Height: 199mmRefrigerant: R290power at -15°C: 615/792/996/10 228 W power at -20°C: 467/602/759/941 W power at -25°C: 39°C: 39°C: 39°C: 3/509/645/805 W311/402/510/638 Wtension: 22 0-240 V

Technical Details of AHT Athen XL :210 (-) AD	:Version of Chiller
Gross Content: 1177 liters	Manufacturer: AHT
Net Content: 875 liters	Model: Athen 210(-) AD
Display Area: 1,75 m²	High energy savings compared to conventional compound systems
Ambient Temperature: +16 bis +25 °C	AHT e-conomize: Additional high energy saving potential through comprehensive optimization in technology and design
Temperature Range: -18 °C bis -23 °C	Improved product inspection with optimized usable net content of chiller
Rated Voltage / Normal Frequency: 220 – 240 V / 50 Hz	Ecologically harmless by the natural refrigerant propane
Rated Power Consumption: 450 W	Completely CFC and HFC-free
Rated Power Consumption Light: (ca. 28 W (optional	Secured product quality due to constant internal temperature with high power reserves
Rated Current: 2.0 A	Ready to plug in without installation effort
Protection: 16 A	Low investment and operating costs
Energy Consumption (at 25 °C): 8.7 kWh / 24 h	Refrigeration is maintenance free

Length of Connection Cable: 1750 mm	Large curved glass sliding lid
Refrigerant: R290	
Refrigerant Quantity: 110 g	
Max. Permissible Operating Pressure: 30 bar	
Length (Outside / Inside): 2102 / 1970 mm	
Depth (Outside / Inside): 993 / 860 mm	
Working Height (Front / Outside Height): 800 / 910 mm	
Stacking Height: 600 mm	
Weight (Net): 141 kg	
(Lighting: LED (optional	
Year of construction: 2010 +/- 3 years	

SLV1SCNX

معلومات عامة


- **الموديل**: SLV15CNX LBP R290 inverter blcd
- **القدرة الحصانية**: عادةً ما يكون تصنيف القدرة الحصانية لهذا الموديل هو **HP 5/8** (حوالي 0.625 HP).

- **النـوع**: يُصـنف كضاغـط ضغـط منخفـض (LBP)، ممـا يجعلـه مناسـبًا لتطبيقات التبريد.
- **التوافـق**: متوافـق مـع موديـل دانفـوس 104H-8568، ممـا يـدل علـى استخدامه في أنظمة التبريد المختلفة.

الاستخدامات

هذا الضاغط مصمم للكفاءة والموثوقية في إعدادات التبريد التجارية، وخاصةً حيث يتم استخدام غاز التبريد R290. يعد خيارًا جيدًا للمشاريع التي تتطلب أداءً عاليًا في بيئات العمل المختلفة.



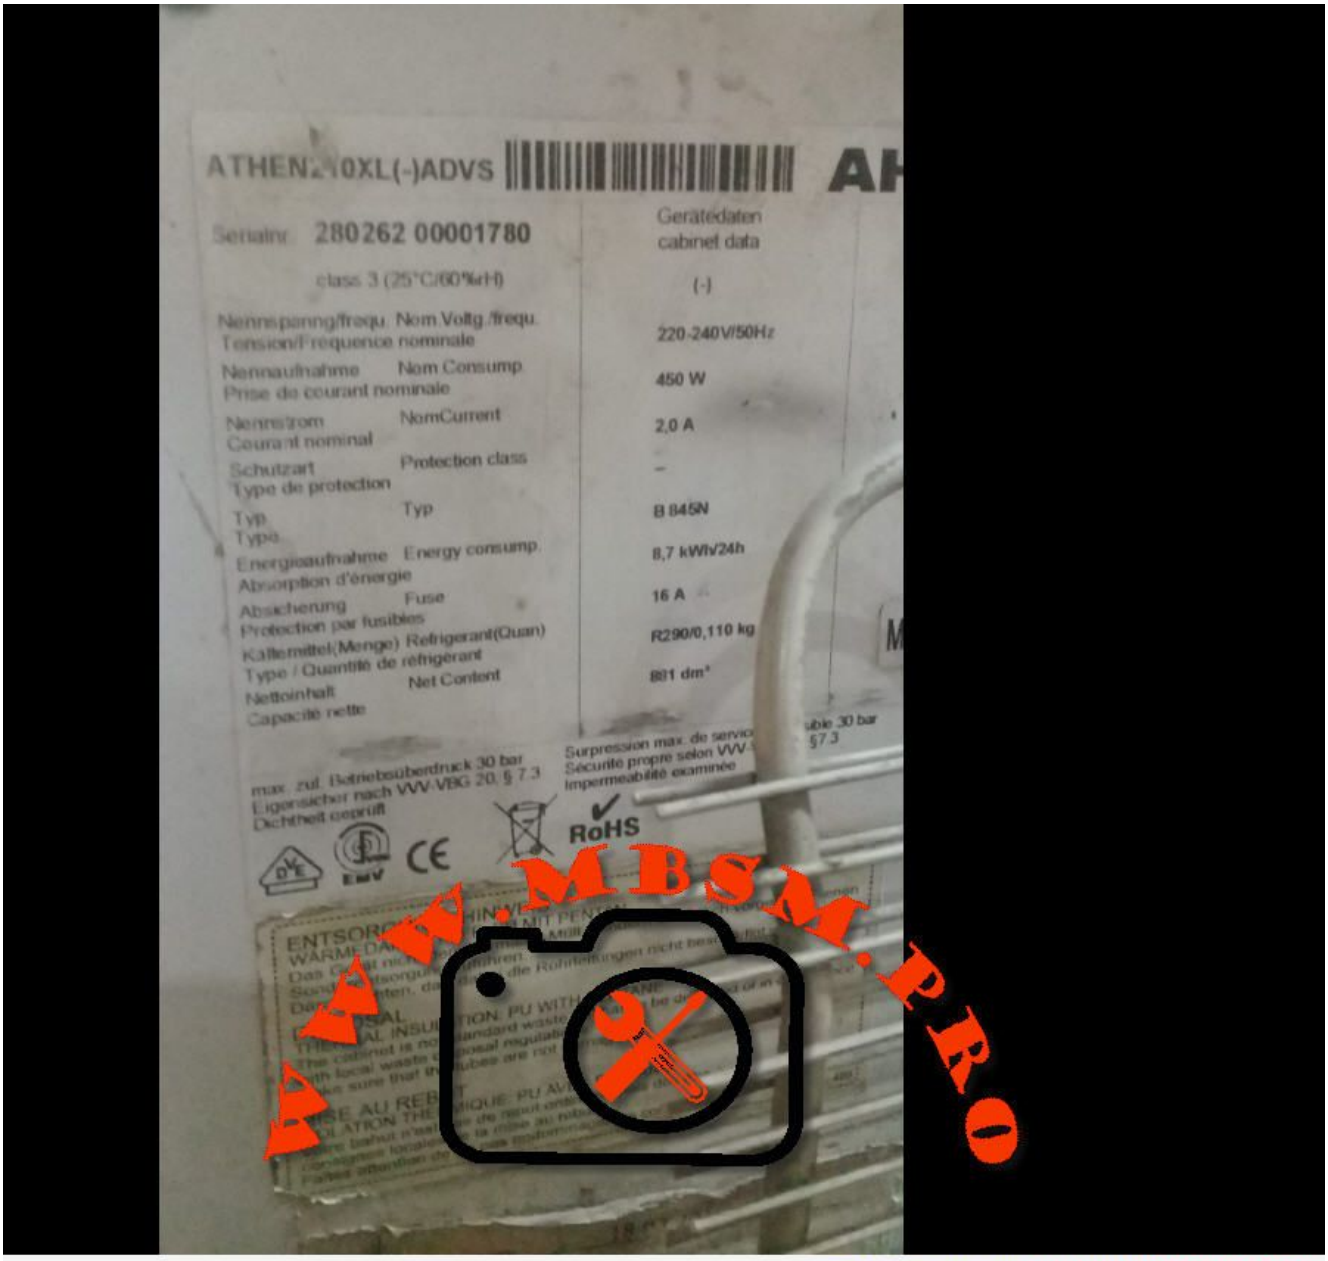

Picture Private Copyright WWW.MBSMGROUP.TN



Picture Private Copyright WWW.MBSMGROUP.TN