

EGL70AT

تقنية :Category

2024 نوفمبر، written by Mahdi MILED | 24



Picture Private Copyright WWW.MBSMGROUP.TN

Compresseurs ZMC, EGL70AT, 1/5Hp, 1Ph, GL70AT, R-134a, efficacité standard, 220-240V 50Hz, compresseur Cubigel, Cubigel, RSIR, LBP - LST - S, sans condensateur de démarrage

LX110LAJM

تقنية :Category

2024 نوفمبر، written by Mahdi MILED | 24

Fixed Speed R134A [5 of 5]

Application : LBP

Refrigerant	Series	Model	Motor Type	Voltage	Frequency	Test Condition	Performance					Dimension
				[V]	[Hz]		Capacity		EER	COP	Height	
							[Kcal/hr]	[Btu/Whr]	[Watts]	[Btu/Whr]		[W/W]
R134A	LX	LX72LATG	RSR	220 ~ 240	50	ASHRAE -23.3 ℃ / 54.4 ℃	170	675	198	4.24	1.24	203
				220	60		213	846	248	4.67	1.37	
		LX72LHH	CSR	220	50		172	683	200	4.24	1.24	203
		LX72LHQF	CSR	110 ~ 115	60		213	846	248	3.91	1.15	203
		LX86LACM	RSCR	115	60		245	973	285	4.91	1.44	203
		LX86LADM	RSCR	220	60		250	993	291	5.14	1.51	203
		LX86LCEG	RSR	220 ~ 240	50		194	770	226	4.23	1.24	203
		LX86LHCM	RSR	115	60		245	973	285	4.79	1.40	203
		LX86LHEM	RSCR	220 ~ 240	50		194	770	226	4.30	1.26	203
				220	50		196	778	228	4.10	1.20	203
				220	60		247	981	287	4.50	1.32	
		LX95LABH	CSR	220	50		230	913	267	4.35	1.27	203
				220	60		280	1,112	326	4.96	1.45	
		LX95LABM	RSCR	220	50		230	913	267	4.35	1.27	203
				220	60		280	1,112	326	4.96	1.45	
		LX95LAQH	CSR	110 ~ 115	60		285	1,131	331	4.92	1.44	203
		LX95LHBM	RSCR	220	50		230	913	267	4.41	1.29	203
				220	60		280	1,112	326	4.97	1.46	
				100	50		270	1,072	314	4.20	1.23	203
				100	60		300	1,191	349	4.67	1.37	203
		LX110LAJM	RSCR	220	50		270	1,072	314	4.54	1.33	203
		LX110LAH	CSR	220	50		270	1,072	314	4.54	1.33	203
		LX125LAJM	RCSR	220	50		315	1,251	366	4.50	1.32	203
		LX125LAJ	CSR	220	50		315	1,251	366	4.42	1.29	203
		LX125LBJM	RSCR	220	50		300	1,191	349	4.25	1.24	203

· LX

236

220

Picture Private Copyright WWW.MBSMGROUP.TN



ضاغط LG LX110LAJM هو ضاغط ثلاثيات يعمل بقدرة 1/2 حصان

SLV15CNK

تقنية: Category

2024 written by Mahdi MILED | 24



Picture Private Copyright WWW.MBSMGROUP.TN

Compressor SLV15CNK.2. Speed: 2000/2500/3000/4000 rev/min More features: LBP 12 kg displacement 15.2 cm frequency: 50/60 Hz 12 kg 15,28 cm 3 Height: 199 mm Refrigerant: R290 power at -15°C: 615/792/996/10 228 W power at -20°C: 467/602/759/941 W power at -25°C: 39°C: 39°C: 39°C: 3/509/645/805 W 311/402/510/638 W tension: 22 0-240 V

[WF-100DR](#)

تقنية : Category

2024, نوفمبر written by Mahdi MILED | 24

HYB35MGJa	125B4197	3.50	1/12	LBP	S	220-240V 50Hz	RSCR	P	C	23	31	41	1.20	86	55	1.52	5.00	HYBd
HL35NA	123B8427	3.50	1/12	LMBP	S	220-240V 50Hz	RSCR	P	C	23	31	41	1.10	78	56	1.43	4.90	HLb
HYB40MJa	125B4198	4.00	1/10	LBP	S	220-240V 50Hz	RSIR	P	C	27	36	48	0.91	91	65	1.15	4.40	HYBc
HYB40MHJa	125B4201	4.00	1/10	LBP	S	220-240V 50Hz	RSIR	P	C	27	36	48	1.05	91	65	1.33	4.70	HYBd
B43CB	123B8405	4.30	1/10	LBP	S	220-240V 50Hz	RSIR	P	C	29	39	51	0.90	108	69	1.15	4.60	Bc
B43CB	123B8405	4.30	1/10	LBP	S	220-240V 50Hz	RSCR	P	C	29	39	51	1.02	108	69	1.30	4.60	Bc
HK48NA	123B8428	4.80	1/8	LMBP	S	220-240V 50Hz	RSCR	P	C	30	41	53	1.10	112	73	1.43	5.20	HKb
HYB50MHJa	125B4199	5.00	1/8	LBP	S	220-240V 50Hz	RSIR	P	C	32	43	56	1.03	119	75	1.30	4.70	HYBd
HYB50MGJa	125B4202	5.00	1/8	LBP	S	220-240V 50Hz	RSCR	P	C	35	47	61	1.21	129	82	1.53	5.00	HYBd
B52CL	123B8408	5.20	1/8	LBP	S	220-240V 50Hz	RSIR	P	C	33	44	58	0.90	123	78	1.20	4.60	Bc
B52CL	123B8408	5.20	1/8	LBP	S	220-240V 50Hz	RSIR	P	C	33	44	58	1.10	123	78	1.42	5.20	Bd
HYB60MHU	125B4223	6.00	1/6	LBP	S	220-240V 50Hz	RSIR	P	C	43	57	75	1.07	159	100	1.35	5.30	HYBe
HYB60MKUa	125B4224	6.00	1/6	LBP	S	220-240V 50Hz	RSCR	P	C	43	57	75	1.31	159	100	1.65	6.20	HYBf
HYB69MKUa	125B4225	6.90	1/5	LBP	S	220-240V 50Hz	RSCR	P	C	57	77	101	1.31	214	118	1.65	6.30	HYBf
HYE81MGUa	125B4205	8.10	1/4	LBP	S	220-240V 50Hz	RSCR	P	C	64	86	113	1.17	239	140	1.53	6.90	HYEb
HYE90MKUa	125B4206	8.90	1/4	LBP	S	220-240V 50Hz	RSCR	P	C	72	93	123	1.27	265	152	1.65	9.30	HYEb
HYE90MXU63	125B4213	8.90	1/4	LBP	ST	220-240V 50/60Hz	RSCR	P	C	72	96	126	1.37	267	155	1.80	9.40	HYEb
HYE105MTU63	125B4215	10.50	1/4	LBP	ST	220-240V 50/60Hz	RSCR	P	C	78	106	138	1.30	292	175	1.65	9.10	HYEd
HYE105MKUa	125B4226	10.50	1/4	LBP	S	220-240V 50Hz	RSCR	P	C	79	106	140	1.26	294	185	1.60	8.80	HYEb
HYE113MKUa	125B4207	11.30	3/8	LBP	S	220-240V 50Hz	RSCR	P	C	85	115	150	1.30	318	200	1.65	8.50	HYEb
HYE125MSUa	125B4227	12.30	3/8	LBP	S	220-240V 50Hz	RSCR	P	C	93	125	164	1.49	347	218	1.89	9.30	HYEb
HYE131MKUa	125B4209	13.10	1/2	LBP	S	220-240V 50Hz	RSCR	P	C	101	135	177	1.29	375	235	1.63	9.10	HYEd
HYE153MKU (*)	125B4228	15.30	1/2	LBP	S	220-240V 50Hz	RSCR	P	C	114	153	200	1.30	424	265	1.65	9.40	HYEd

Private Picture Copyright : WWW.MBSM.PRO

Picture Private Copyright WWW.MBSMGROUP.TN

ديب فريزر وايت ويل 4 درج تروبيكل فروست 80 لتر (WF-100DR)

RAQ 012A5CM

Category: تقنية

2024 written by Mahdi MILED | 24



Picture Private Copyright WWW.MBSMGROUP.TN

WINDOW UNIT, UNITE FENETRE, MODEL: RAQ 012A5CM EXP, SN: 0000079275, unionaire®, FOR EXPORT, VOLT 220-240Hz50, RH207VRFT, Compressor, Mitsubishi RH207VHET, 1.34 hp, 1ph 220v, 3095 kcal, 12283 btu/h, 1150 w, 5.3 a, 1 kw, r22

[RH207VHET](#)

تقنية :Category

2024 ، نوفمبر written by Mahdi MILED | 24



Picture Private Copyright WWW.MBSMGROUP.TN

RH207VRFT, Compressor, Mitsubishi RH207VHET, 1.34 hp, 1ph 220v, 3095 kcal, 12283 btu/h, 1150 w, 5.3 a, 1 kw

MKV190GL2J

تقنية :Category

2024 نوفمبر، written by Mahdi MILED | 24

BLDC LBP

R 134a LBP

RATED VOLTAGE	MODEL	VOLTAGE [V-Hz]	RUNNING RPM	COOLING CAPACITY			POWER		EFFICIENCY		COOLING TYPE
				Kcal/Hr	Watt	BTU/Hr	W	Kcal/WHr	COP	EER	
AC 115V-60Hz	MKV172C-L2J	115-60	1800	110	128	437	72	1.53	1.78	6.07	FC
			2200	135	157	536	90	1.50	1.74	5.96	
			2880	176	205	699	120	1.47	1.71	5.82	
			3480	212	247	842	151	1.40	1.63	5.57	
			3600	223	259	885	160	1.39	1.62	5.53	
	MKV190C-L2B	115-60	1800	146	170	580	89	1.64	1.91	6.51	FC
			2200	174	202	691	107	1.63	1.89	6.46	
			2880	227	264	901	145	1.57	1.82	6.22	
			3480	274	319	1088	186	1.47	1.71	5.85	
			3600	294	342	1167	200	1.47	1.71	5.84	
	MKV190C-L2J	115-60	1800	146	170	580	93	1.57	1.83	6.23	FC
			2200	174	202	691	113	1.54	1.79	6.11	
			2880	227	264	901	152	1.49	1.74	5.93	
			3480	274	319	1088	195	1.41	1.63	5.58	
			3600	294	342	1167	210	1.40	1.63	5.56	
AC 220-240V-50Hz, 220V-60Hz	MKV172G-L2J	220-50/60	1800	110	128	437	72	1.53	1.78	6.07	FC
			2200	135	157	536	90	1.50	1.74	5.96	
			2880	176	205	699	120	1.47	1.71	5.82	
			3480	212	247	842	151	1.40	1.63	5.57	
			3600	223	259	885	160	1.39	1.62	5.53	
	MKV190G-L2B	220-50/60	1800	146	170	580	89	1.64	1.91	6.51	FC
			2200	174	202	691	107	1.63	1.89	6.46	
			2880	227	264	901	145	1.57	1.82	6.22	
			3480	274	319	1088	186	1.47	1.71	5.85	
			3600	294	342	1167	200	1.47	1.71	5.84	
	MKV190G-L2J	220-50/60	1800	146	170	580	93	1.57	1.83	6.23	FC
			2200	174	202	691	113	1.54	1.79	6.11	
			2880	227	264	901	152	1.49	1.74	5.93	
			3480	274	319	1088	195	1.41	1.63	5.58	
			3600	294	342	1167	210	1.40	1.63	5.56	
			1400	80	93	318	56	1.43	1.66	5.67	

Picture Private Copyright WWW.MBSMGROUP.TN

Compressor, SAMSUNG, MKV190GL2J, Bldc, 1/3 hp, Inverter, from 93 to 210 w, lbp, r134a, from 560 btu/h to 1167 btu/h

GL99BL

تقنية :Category

2024, نوفمبر written by Mahdi MILED | 24

Model / Modèle	Power / Potencia	Cpr cooling / Enkühlung	Displacement / Hubraum	Kälteleistung Production frigorifique COP _e WW / W = 0,864 kcal/h = 3,415 BTU/h				Evaporating temp./Temp. de évaporation Verdampfungstemp./Temp. d'évaporation		Expansion / Expand	Oil / Aceite	Weight / Peso	Motor / Motor	Arrang / Arrang
hp	Leistung / Potencia	Kühlung / Refroidissement	cm ³					°C		Embrasure / Dénivel	Oil / Aceite	cm ³	kg	cm
LBP														
R134a														
50 Hz														
220-240V 50Hz ~I														
GD24AA														
GD30AA														
GD36AA														
GD40AA														
GL45AA														
GL45AAb														
GL50AA														
GL60AA														
GL60AAb														
GL60BH														
GL70AA														
GL75AA														
GL80AA														
GL80AAb														
GL80BH														
GL80DA														
GL90AA														
GL90AAb														
GL90BH														
GL90DA														
GL99AA														
GL99AAb														
GL99BH														
GP12AB														
GP12BB														
GP12CB														
GP12FB														
GP14BB														
GP14CB														
GP14EB														
GP14FB														
GP16BB														
GP16CB														
GP16FB														
GX18FB														
GX21FB														
200-240/220-230V 50/60Hz ~I														
GL99BL														

Picture Private Copyright WWW.MBSMGROUP.TN

Huaguang, Compressor, GL99BL, lbp, 1/4h ,

FFI 7.5HAK

تقنية: Category

2024 written by Mahdi MILED | 24

250 a 400	220 a 370	EMI 60HER (□)	575	1/6	115 VAC	190 VAC	0,028	0,71	61	13	10,5	-10°C
					158 a 190 120 VAC	70 a 84 210 VAC	0,031	0,80	110	2800	9,4	
280 a 480	240 a 400	FFI 6HAK	675	1/5	158 a 190 120 VAC	64 a 77 220 VAC	0,035	0,90	157	4000	13,5	
350 a 575	275 a 450	FFI 7,5HAK	765	1/5+	175 a 228 100 VAC	64 a 77 180 VAC	0,028	0,71	49	1250	10,5	
		FF 8,5HBK	740	1/4	270 a 324 115 VAC	88 a 108 220 VAC	0,031	0,80	87	2200		
							0,035	0,90	157	4000		
450 a 700	350 a 575	FFI 8,5HAK	830	1/4	243 a 292 100 VAC	64 a 77 200 VAC	0,031	0,80	69	1750	11,9	
		FF 10HBK	840	1/4+	460 a 552 115 VAC	88 a 108 220 VAC	0,035	0,90	124	3150		
							0,039	1,00	203	5150		
575 a 900	450 a 700	FFI 10HAK	1030	1/4+	233 a 280 120 VAC	53 a 64 230 VAC	0,031	0,80	51	1300	13,5	
							0,035	0,90	94	2400		
							0,039	1,00	157	4000		
750 a 1200	650 a 1000	FFI 12HBX (HST)	1190	1/3+	378 a 454 (□) 115 VAC	124 a 149 (□) 220 VAC	0,039	1,00	94	2400	17,5	
					233 a 280 (□) 150 VAC	64 a 77 (□) 250 VAC	0,042	1,07	134	3400		
							0,044	1,12	170	4300		

□ □ * □ □ □ □ vide leyenda en la pagina 24

Picture Private Copyright WWW.MBSMGROUP.TN

Compressor, SR075Z, 1/5 hp++, lbp, r134a, refrigerator COLDEX , Equivalent, Cubigel GL75AA, ACC , GVM66AA, AS80, Embraco FFI7.5HAK, EMT60HLP, NBT1116Z, Secop, TLES6.5FT.3

T1116Y

تقنية :Category

2024 ,نوفمبر written by Mahdi MILED | 24



T系列R600a压缩机技术参数表											
TECHNICAL DATASHEET OF T SERIES R600a REFRIGERATION COMPRESSOR (LBP)											
Compressor	Displ.	Motor	Vol./Fre.	制冷量Cooling Capacity				COP			
Model		Type		ASHRAE		CECOMAF		ASHRAE		CECOMAF	
压缩机型号	气缸容积	电机型式	电压/频率	W	BTU/h	Kcal	W	W/W	BTU/Wh	W/W	电机绕组材料 主机/铜机 Material of winding Main/Aux.
	(cm3)		(V~/Hz)								
T1090Y	6.0	RSIR	220~240/50	100	341	86	75	1.42	4.85	1.11	Al/Al
T1110Y	6.7	RSIR	220~240/50	115	392	99	86	1.45	4.95	1.13	Al/Al
T1111Y	7.2	RSIR	220~240/51	126	430	108	95	1.4	4.78	1.09	Al/Al
T1112Y	8.1	RSIR	220~240/50	140	478	120	105	1.42	4.85	1.11	Al/Al
T1113Y	8.9	RSIR	220~240/50	152	519	131	114	1.42	4.85	1.11	Al/Al
T1114Y	9.6	RSIR	220~240/50	168	573	144	126	1.42	4.85	1.11	Al/Al
T1116Y	10.5	RSIR	220~240/50	184	628	158	138	1.4	4.78	1.09	Al/Al
TT1110GY	6.7	RSIR	220~240/50	114	389	98	85.5	1.55	5.29	1.21	Al/Al
		RSCR						1.62	5.53	1.26	
TT1111Y	7.2	RSIR	220~240/50	126	430	108	95	1.55	5.29	1.21	Al/Al
TT1112GY	8.1	RSIR	220~240/50	140	478	120	105	1.52	5.19	1.19	Al/Al
		RSCR						1.60	5.46	1.25	
TT1113GY	8.9	RSIR	220~240/50	155	529	133	116.25	1.55	5.29	1.21	Al/Al
		RSCR						1.62	5.53	1.26	
TT1114GY	9.6	RSIR	220~240/50	168							
About Company Profile Culture											

Picture Private Copyright WWW.MBSMGROUP.TN

Compresseur, JIAXIPERA, T1116Y, 1/5 Hp, LBP, R600a, 220-240V, 10,5 cm3., 184 W, 628 BTU/u

Türk Elektrik Endüstrisi

تقنية: Category

2024 نوفمبر، written by Mahdi MILED | 24

نوع الفريون	نوع التطبيق	موديل الضاغط	الإنارة	كمية الزيت	طريقة تبريد الضاغط	لاستطاعة عند درجة C°-23.3	
						Kcal /hr	W
						واط تبريد	ك كالوري /سا
R134a	تبريد LBP	TE 150 YP	6,36	430	ستاتيك	149	173
		TE 150 YT	6,36	430	ستاتيك		
		TE 165 YP	6,91	430	ستاتيك	165	192
		TE 165 YT	6,91	430	ستاتيك		
		TE 180 YP	7,50	360	ستاتيك	181	210
		TE 180 YT	7,50	360	ستاتيك		
		TE 195 YP	7,94	360	ستاتيك	193	224
		TE 195 YT	7,94	360	ستاتيك		
		TE 215 YP	8,99	360	ستاتيك	217	252

الضواغط التركيبية تورك اليكتروك الصناعية (AR Çelik (Türk Elektrik Endüstrisi

Gtm75aa

Category: تقنية

2024 written by Mahdi MILED | 24 نوفمبر،

161 7.6

00a

高度 净重

Height (h) Net Weight

mm kg

165 7.5

165 7.5

165 7.5

165 7.5

165 7.5

165 7.5

165 7.5

165 7.5

165 7.5

165 7.5

型号	电机	频率	排气量	电机功率	电机类型	制冷量	输入功率	性能系数	启动电容	高度	净重
Model	Motor	Freq.	Displ.	Power	Motor Type	Cooling Capacity	Input Power	COP	Start Capacitor	Height (h)	Net Weight
		hz	cc	hp		w	w	w/w	µF	mm	kg

HMBP Range 中高背压系列

220-240V/50Hz

GL80TB	Cu	50	7.5	1/2	CSIR	740	326	2.27	50	184	10.0
GL90TB	Al	50	9.3	1/2	CSIR	860	420	2.05	50	184	10.0
GL10TB	Cu	50	9.3	1/2	CSIR	880	429	2.05	50	184	10.2

200-220V/50Hz, 220-230V/60Hz

GL60TG	Cu	50/60	5.3	1/3	CSIR	540/640	240/262	2.25/2.44	50	174	8.8
--------	----	-------	-----	-----	------	---------	---------	-----------	----	-----	-----

LBP Range 低背压系列

220-240V/50Hz

GTM26AA	Cu/Al	50	2.6	1/12	RSIR	65	59	1.10	-	163	7.5
GTM75AA	Al	50	7.5	1/5	CSIR	200	160	1.25	50	184	9.0
GTM93AA	Cu	50	10.0	1/3	RSIR	280	207	1.35	-	184	9.5
GTM10AA	Cu	50	10.6	1/3	CSIR	300	226	1.33	50	184	10.0
GTM12AA	Cu	50	12.0	1/3	CSIR	320	241	1.33	50	184	10.0

200-220V/50Hz, 220-230V/60Hz

GTM93AG	Cu	50/60	9.3	1/3	CSIR	248/290	216/220	1.15/1.32	50	184	9.6
---------	----	-------	-----	-----	------	---------	---------	-----------	----	-----	-----

注 NOTE

冷却方式 Cooling Type
静态冷却 Static Cooling
应用条件 Application

低背压

测试工况

蒸发温度 Evaporating temperature -23.3°C
冷凝温度 Condensing temperature 54.4°C
过冷温度 Subcooling temperature 32.2°C
吸气温度 Suction temperature 32.2°C
环境温度 Ambient temperature 32.2°C

LBP

TEST CONDITIONS(ASHRAE)

蒸发温度 Evaporating temperature -23.3°C
冷凝温度 Condensing temperature 54.4°C
过冷温度 Subcooling temperature 32.2°C
吸气温度 Suction temperature 32.2°C
环境温度 Ambient temperature 32.2°C

中高背压

测试工况

蒸发温度 Evaporating temperature 7.2°C
冷凝温度 Condensing temperature 55°C
液体温度 Liquid temperature 46°C
过热温度 Superheating temperature 35°C
吸气温度 Suction temperature 35°C
环境温度 Ambient temperature 35°C

HMBP

TEST CONDITIONS(ASHRAE)

蒸发温度 Evaporating temperature 7.2°C
冷凝温度 Condensing temperature 55°C
液体温度 Liquid temperature 46°C
过热温度 Superheating temperature 35°C
吸气温度 Suction temperature 35°C
环境温度 Ambient temperature 35°C

www.Mbam.pro

Compresseur, Gtm75aa, HERMETIC, Congélateur, COMPRESSEUR, ZEL, 1/5 cv, R134a, 220-240V/50HZ, Ariston no frost

QD123Y

تقنية: Category

2024 نوفمبر written by Mahdi MILED | 24



Série R600a

Réfrigérant	Application	Modèle	Série	Pouvoir	Refroidissement	Type de moteur	Alimentation électrique	Capacité de refroidissement		CO ₂
								*ASHRAE-23,3	*CECOMAF-25	*AS-23,3
R600a	LBP	W40CY	L	1/14	S	RSIR	220/50	55	43	0,9
R600a	LBP	S53CY	S	1/10	S	RSIR	220/50	75	57	1.2
R600a	LBP	S65CY	S	1/8	S	RSIR	220/50	95	72	1.2
R600a	LBP	S75CY	S	1/7	S	RSIR	220/50	118	86	1.2
R600a	LBP	SK53CY	S	1/10	S	RSCR	220/50	75	57	1.3
R600a	LBP	L76CY	L	1/6	S	RSIR	220/50	132	100	1.3
R600a	LBP	L88CY	L	1/5	S	RSIR	220/50	153	116	1.3
R600a	LBP	QD60AY	N	1/7	S	RSIR	100/60	125	95	1.3
R600a	LBP	QD76Y	N	1/6	S	RSIR	220/50	132	100	1.3
R600a	LBP	QD88Y	N	1/5	S	RSIR	220/50	153	116	1.3
R600a	LBP	QD100Y	N	1/5+	S	RSIR	220/50	170	129	1.3
R600a	LBP	QD123Y	N	1/4	S	RSIR	220/50	187	142	1.3
R600a	LBP	LK88CY	L	1/5+	S	RSCR	220/50	160	122	1.5


www.Mbsm.pro

Compressor, QD123Y,Donper,R600A,1/4HP,RSIR,220V/1HP/50Hz,187W

FF10BKW

تقنية: Category

2024, نوفمبر written by Mahdi MILED | 24

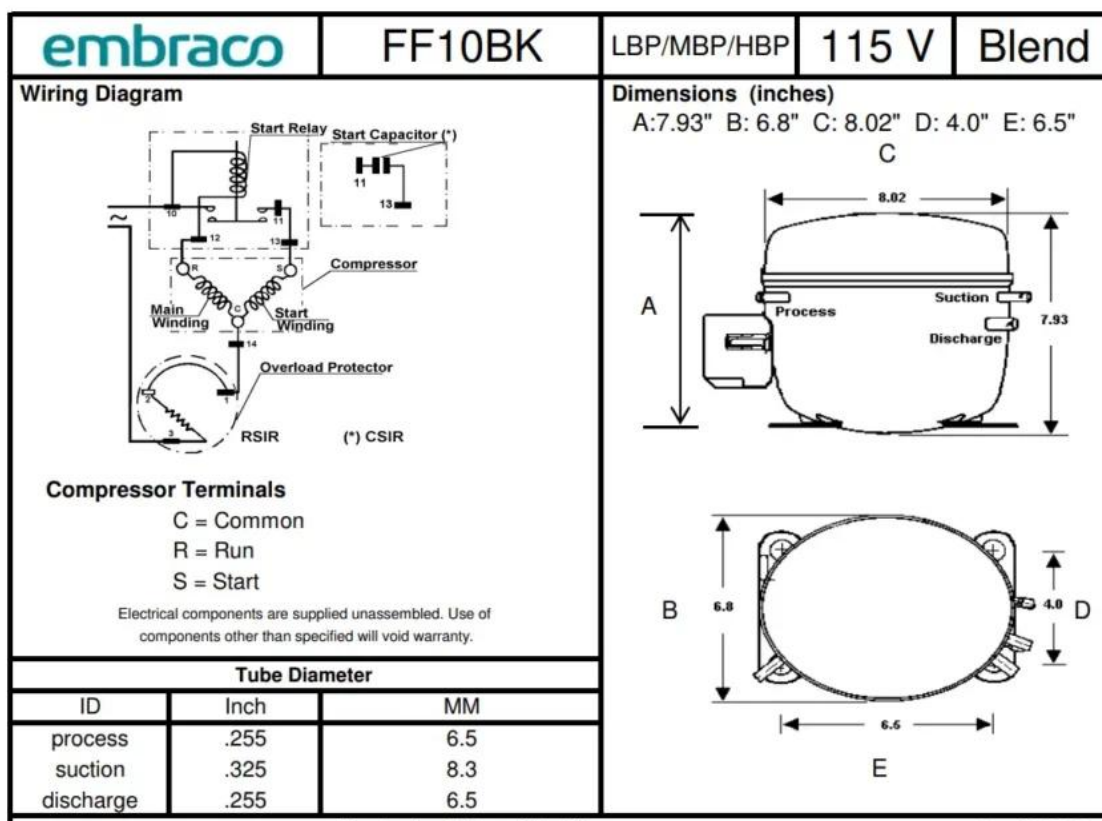

Compressor, Embraco, FF10BKw, hbp, lbp, 1/4 hp++, r12 , Start capacitor 460-552 mfd,

debile fregorifique

Category: صور

2024 written by Mahdi MILED | نوفمبر



صور مضحكة لمجانين التبريد والتكييف

[HYE55YL63/GML140A](#)

Category: تقنية

2024 written by Mahdi MILED | 24

Lambda

型号	电机	排气量	电机功率	电机类型	频率	制冷量	输入功率		性能系数		运行电容	高度	净重
Model	Motor	Displ.	Power	Motor Type	Freq.	Cooling Capacity	Input Power without RC	Input Power with RC	COP without RC	COP with RC	µF	Height (h)	Net Weight
		cc	hp		hz	w	w	w	w/w	w/w		mm	kg

220-240V/50Hz

普效系列 Standard Efficiency Range

GML140A	Al	4.9	1/6	RSIR	50	140	112		1.25		-	152	6.3
GML160A	Al	5.7	1/6	RSIR	50	160	128		1.25		-	161	7.0
GML180A	Al	6.5	1/5	RSIR	50	180	144		1.25		-	161	7.0
GML200A	Al	7.0	1/5	RSIR	50	200	160		1.25		-	164	7.3

115V/60Hz

普效系列 Standard Efficiency Range

GML145D	Al	4.4	1/7	RSIR/RSCR	60	145	97	92	1.50	1.57	10	164	7.0
GML175D	Al	4.9	1/6	RSIR/RSCR	60	175	118	112	1.48	1.56	10	164	7.0

中效系列 Medium Efficiency Range

GDL145D	Cu	4.4	1/8	RSIR/RSCR	60	145	94	87	1.55	1.67	10	161	7.3
GDL175D	Cu	5.3	1/6	RSIR/RSCR	60	175	112	106	1.56	1.65	10	161	7.3

高效系列 High Efficiency Range

GXL175D	Cu	4.9	1/7	RSCR	60	175		101		1.73	10	164	7.6
GXL200D	Cu	5.7	1/6	RSCR	60	200		116		1.73	10	164	7.6

超高效系列 Top Efficiency Range

GPL175D*	Cu	4.9	1/7	CSCR	60	175		97		1.80	10	161	7.6
----------	----	-----	-----	------	----	-----	--	----	--	------	----	-----	-----

Zeta

R600a



220-240V/50Hz

HKD86FSL	8.6	PPM	1400-3600
HKD10FSK	10.0	PPM	1400-4000
HKD12FSL	12.0	PPM	1400-3600

115V/50-60Hz

GKD44FDK	4.4	PPM	1400-4000
GKD75FDK	7.5	PPM	1400-4000

Commercial Application 商用产品系列

型号	电机	频率	排气量	电
Model	Motor	Freq.	Displ.	Power
		hz	cc	

HMBP Range 中高背压系列

مقارنة بين كباس HYE55YL63 وكباس GML140A

[HYE60YL63](#)

Category: تقنية

2024 written by Mahdi MILED | 24

MODEL	HYE60YL63	
Refrigerant	R134a	
Application	Low Back Pressure (LBP)	
Motor Type	RSCR	
Cooling Method	Static Cooling	
Cooling Capacity	Kcal/Hr	150.5
	Btu/Hr	597.1
Power Input	W	159
EER	Btu/W.Hr	3.75
Displacement	Cm3	6.05
Oil Charge	cc	200
Voltage Range*	v	160-254
Net Weight	Kg	8.14
Gross Weight	Kg	8.74
Electrical Accessories :		
Part Name	Model No.	
Start Relay	QP2-12/B3	
Thermal Protector	DRB23P61A1	
Run Capacitor	3.0 μ F (female 6.3)	



Huayi, HYE60YL63, Compresseur, 1/5 cv, r134a, 146 kcal, tout cuivre

PH31VNET

تقنية: Category

2024 written by Mahdi MILED | نوفمبر، 24

COMPRESSORS

COMPRESSORS R-22

SCROLL COMPRESSOR FOR 220V/1PH/50HZ



TRANE CDU MODEL	MODEL	P/N	BTUH	V/Ph/Hz	LISTED PRICE
TTK518MB5, TTK518LB5	ZR22K3-PFJ	015-0142	18,700	220/1/50	7,800.00
TTK524LB50BA	ZR26K3-PFJ	015-0141	22,200	220/1/50	8,600.00
TTK524MB5EAA, TTK524BB5A00	ZR28KM-PFZ	015-0286	23,000	220/1/50	9,000.00
TTK524PB, 524LB, 024QB	ZR30K3-PFJ	015-0197	25,900	220/1/50	9,200.00
TTK5247B5E00, TTK524LB50JA	ZR30KM-PFZ	015-0287	25,000	220/1/50	9,400.00
TTK524LB50DA	ZR30KS-PFZ	015-0266	25,000	220/1/50	8,800.00
TTK530KB50CA	ZR32KS-PFZ	015-0253	27,000	220/1/50	8,900.00
TTK530KB50BA, TTK530MB5EAA	ZR34K3-PFJ	015-0143	28,800	220/1/50	9,600.00
TTK530KB, 530JA, TTK030QB	ZR40K3-PFJ	015-0144	33,900	220/1/50	10,200.00
TTK536KB50CA	ZR42K3-PFJ	015-0256	35,500	220/1/50	11,700.00
TTK536KB, 536JA, TTK036QB	ZR45K3-PFJ	015-0171	38,900	220/1/50	11,500.00

SCROLL COMPRESSOR FOR 380V/3PH/50HZ



TRANE CDU MODEL	MODEL	P/N	BTUH	V/Ph/Hz	LISTED PRICE
TTK042KD50CA	AH60YBCT	015-0272	37,600	380/3/50	13,700.00
TTK042KDS0BA, TTK042QD	BH72YGAT	015-0273	45,650	380/3/50	15,700.00
TTK048KD00CA, TTK048QD00BA	BH82YGAT	015-0248	51,620	380/3/50	17,000.00
TTK060KD00DA, TTK060QD00BA	BH96YGAT	015-0247	61,420	380/3/50	20,500.00



TRANE CDU MODEL	MODEL	P/N	BTUH	V/Ph/Hz	LISTED PRICE
TTK536KD50BA	ZR42K3-TFD	015-0207	35,500	380/3/50	12,900.00
TTK536KD, TTK036QD	ZR45KC-TFD	015-0198	38,900	380/3/50	13,000.00
TTK042KDS0CA	ZR54KS-TFD	015-0278	45,000	380/3/50	14,100.00
TTK042KD, 042QD00AA	ZR54KC-TFD	015-0162	45,200	380/3/50	15,000.00
TTK048KDS0DA	ZR61KS-TFD	015-0279	51,000	380/3/50	15,700.00
TTK048QD, 048KD, TTK548AD	ZR61KC-TFD	015-0159	51,000	380/3/50	16,300.00
TTK060KD, 060QD	ZR72KC-TFD	015-0158	60,900	380/3/50	19,100.00
TTA075, 150RD00MA	ZR94KC-TFD-522	015-0209	80,400	380/3/50	34,700.00
TTA150RD0GMA	ZR94KC-TFD-452*	015-0214	80,400	380/3/50	36,000.00
TTA100, 200RD00MA	ZR125KC-TFD-522	015-0167	107,000	380/3/50	37,400.00
TTA200RD0GMA	ZR125KC-TFD-452*	015-0215	107,000	380/3/50	39,000.00
TTA120, 240RD00MA	ZR144KC-TFD-522	015-0168	123,000	380/3/50	40,000.00
TTA240RD0GMA	ZR144KC-TFD-452*	015-0216	123,000	380/3/50	43,000.00

หมายเหตุ * เป็นคอมเพรสเซอร์ที่มี OIL EQUALIZER

Compressor, PH31VNET, r22, 1-1/2 hp, 1-1/2 Ton, 18000 btu/h, Capacitor 45uf, 1 ph/220v

TT113GY

تقنية: Category

2024, نوفمبر written by Mahdi MILED | 24

T SERİSİ R600a AKIŞKANLI KOMPRESÖRÜN TEKNİK BİLGİ FORMU (LBP)

Kompresör Modeli	Silindir Hacmi (cm3)	Motor Tipi	Genilim/ Frekans	Soğutma Kapasitesi				Performans Kat Sayısı				Kapasite Katlama Değeri (µF)	Kapasite Katlama Değeri (µF)	Sertifika	Kompresör Modeli	Silindir Hacmi (cm3)	Motor Tipi
				ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF	ASHRAE	CECOMAF						
				W	BTU/h	Kcal	W	W/W	BTU/h	W/W	BTU/h						
T1090Y	66,0	RSIR	220~240/50	100	341	86	75	1,42	4,85	-	-	-	-	AI/AI	TH1111Y	7,2	RSC
T1110Y	6,7	RSIR	220~240/50	115	392	99	86	1,45	4,95	-	-	-	-	AI/AI	TH1112Y	8,1	RSC
T1111Y	7,2	RSIR	220~240/51	126	430	108	95	1,4	4,78	1,09	-	-	-	AI/AI	TH1113Y	8,9	RSC
T1112Y	8,1	RSIR	220~240/50	140	478	120	105	1,42	4,85	1,11	-	-	-	AI/AI	TH1114Y	9,6	RSC
T1113Y	8,9	RSIR	220~240/50	152	519	131	114	1,42	4,85	1,11	-	-	-	AI/AI	TH1116Y	10,5	RSC
T1114Y	9,6	RSIR	220~240/50	168	573	144	126	1,35	4,61	1,05	-	-	-	AI/AI	TX1070Y	5,0	RSC
T1116Y	10,5	RSIR	220~240/50	184	628	158	138	1,4	4,78	1,09	-	-	-	AI/AI	TX1080Y	5,5	RSC
T1117Y	11,3	RSIR	220~240/50	196	669	169	147	1,4	4,78	1,09	-	-	-	AI/AI	TX1090Y	6,0	RSC
TT1110GY	6,7	RSIR	220~240/50	115	392	99	86,25	1,52	5,19	1,19	-	-	-	AI/AI	TX1110Y	6,7	RSC
		RSCR						1,60	5,53	1,26	2,0	-	-	AI/AI	TX1111Y	7,2	RSC
TT1111GY	7,2	RSIR	220~240/50	126	430	108	94,5	1,55	5,29	1,21	-	-	-	AI/AI	TX1112Y	8,1	RSC
		RSCR						1,60	5,53	1,26	2,0	-	-	AI/AI	TX1113Y	8,9	RSC
TT1112GY	8,1	RSIR	220~240/50	140	478	120	105	1,52	5,19	1,19	-	-	-	AI/AI	TX1114Y	9,6	RSC
		RSCR						1,60	5,46	1,25	4,0	-	-	AI/AI	TX1116Y	10,5	RSC
TT1113GY	8,9	RSIR	220~240/50	155	529	133	116,25	1,52	5,19	1,19	-	-	-	AI/AI	TX1117Y	11,3	RSC
		RSCR						1,60	5,53	1,26	4,0	-	-	AI/AI	TX1119Y	12,1	RSC
TT1114GY	9,6	RSIR	220~240/50	168	573	144	126	1,52	5,19	1,19	-	-	-	AI/AI	TB1070Y	5,0	RSC
		RSCR						1,60	5,46	1,25	4,0	-	-	AI/AI	TB1080Y	5,5	RSC
TT1116GY	10,5	RSIR	220~240/50	184	628	158	138	1,52	5,19	1,19	-	-	-	AI/AI	TB1090Y	6,0	RSC
		RSCR						1,60	5,53	1,26	4,0	-	-	AI/AI	TB1110Y	6,7	RSC
TT1117GY	11,3	RSIR	220~240/50	196	669	169	147	1,52	5,19	1,19	-	-	-	AI/AI	TB1111Y	7,2	RSC
		RSCR						1,60	5,46	1,25	4,0	-	-	AI/AI	TB1112Y	8,1	RSC
TT1119Y	12,1	RSCR	220~240/50	212	723	182	159	1,58	5,39	1,23	4,0	-	-	AI/AI	TB1113Y	8,9	RSC
TG1080Y	5,5	RSCR	220~240/50	92	314	79	69	1,66	5,66	1,29	3,0	-	-	AI/AI	TB1114Y	9,6	RSC
TG1090Y	6,0	RSCR	220~240/50	102	348	88	77	1,66	5,66	1,29	3,0	-	-	AI/AI	TB1116Y	10,5	RSC
TG1110Y	6,7	RSCR	220~240/50	115	392	99	86	1,66	5,66	1,29	3,0	-	-	AI/AI	TB1117Y	11,3	RSC

TT1113GY,compressor, Jiaxipera ,1/5 HP, lbp,r600a

hmk95at

تقنية: Category

2024, نوفمبر written by Mahdi MILED | 24



HMK95AT K3

Product Data Sheet

4 Performance Data

4.1 Cooling Capacity, COP and Input Power

Performance Table Cooling Capacity @ ASHRAE / EN12900 (CECOMAF); 220V, 50Hz; [W]:

Evap. temp. [°C]		-35	-30	-25	-23,3	-20	-15	-10		
Condensing temp. @	ASHRAE [°C]	40	96	124	160	174	204	256	316	
		45	93	121	158	172	202	255	315	
		50	89	118	155	169	200	253	314	
		55	86	115	153	167	198	252	313	
		60	82	112	150	165	196	250	312	
	EN12900 (CECOMAF) [°C]		C55	71	95	126	138	163	207	257

Performance Table COP without RC @ ASHRAE / EN12900 (CECOMAF); 220V, 50Hz; [W/W]:

Evap. temp. [°C]		-35	-30	-25	-23.3	-20	-15	-10		
Condensing temp. @	ASHRAE [°C]	40	1,19	1,41	1,67	1,76	1,94	2,21	2,48	
		45	1,16	1,36	1,60	1,69	1,84	2,11	2,37	
		50	1,13	1,31	1,52	1,59	1,75	2,01	2,26	
		55	1,10	1,25	1,46	1,53	1,68	1,91	2,16	
		60	1,05	1,20	1,39	1,46	1,59	1,82	2,07	
	EN12900 (CECOMAF) [°C]		C55	0,91	1,03	1,20	1,27	1,38	1,57	1,77

Performance Table Input Power without RC @ ASHRAE / EN12900 (CECOMAF); 220V, 50Hz; [W]:

Evap. temp. [°C]		-35	-30	-25	-23,3	-20	-15	-10	
⑥ δ	[°C]	40	81	88	96	99	105	116	127
		45	80	89	99	102	110	121	133

HMK95AT هو ضاغط يعمل بمبرد R600a ويتميز بقدرته الكهربائية التي تعادل 1/5 حصان (0.20 حصان). وفقاً لموقع mbsm.pro